

Spring 2019 - Problem Set 5

ECE 301: Signals and Systems

Prof. Aly El Gamal

Due Date : April 5, 2019

Instructions

1. Please write clearly and legibly.
2. Your solutions must include detailed steps and/or explanations. Do not simply state the answer.
3. Write your full name (first,last), PUID on your homework submission.
4. All problems carry equal weight.

Problem 1

- a What are the impulse response and the frequency response of the Ideal low pass filter?
- b What are the practical limitations of an ideal low pass filter?
- c Given an example of a low pass filter approximation. State both impulse and frequency responses.

Problem 2

- a Find the Fourier transform of $\frac{\sin(4t)\sin(5t)}{t^2}$.
- b Find the inverse Fourier transform of $\frac{\sin^2(4\omega)}{\omega^2}$.

Problem 3

Consider the modulation system shown below in figure 1. The input signal is $x(t)$ and has Fourier Transform $X(j\omega)$ that is zero for $|\omega| > \omega_M$ as shown in figure 2. The output of the system is $y(t)$. Sketch $Y(j\omega)$ which is the Fourier transform of $y(t)$. Show your work in detail and give explanations wherever necessary.

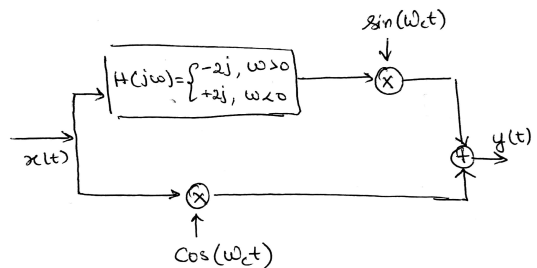


Figure 1: Caption

